


brass compression fittings



 **legris**
connectic

principle of brass compression fittings

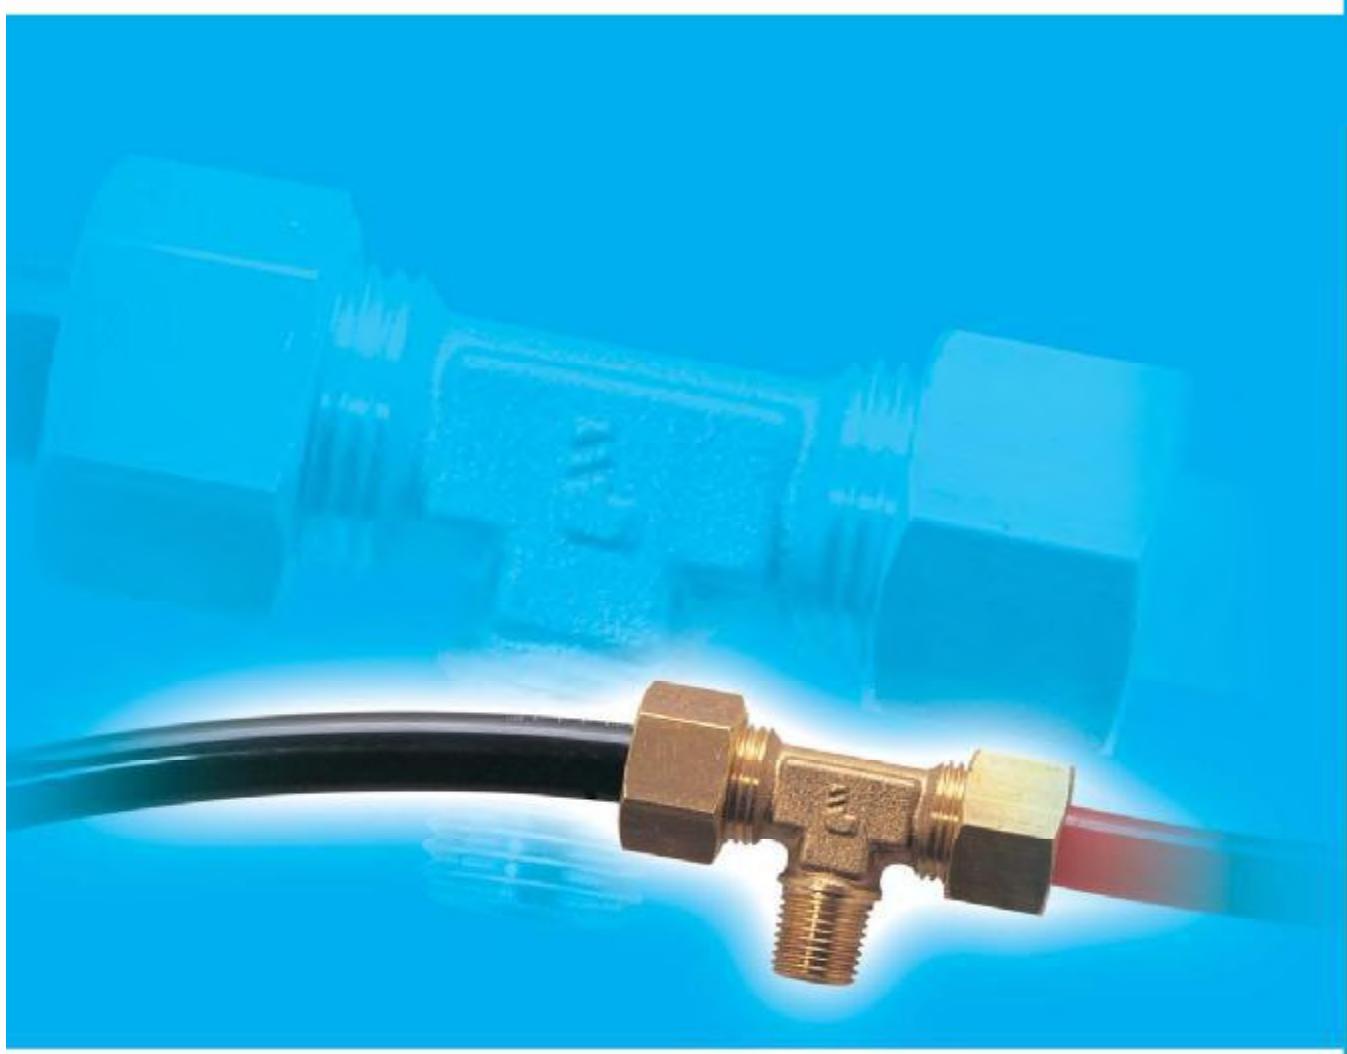

The range is called universal because it offers the maximum number of direct fitting alternatives with the minimum number of components. Tube threading and soldering are unnecessary. Universal brass compression fittings are designed to solve all fluid distribution problems and provide a complete system of fittings suited to all types of tubing, cylinders and valves thanks to the flexibility offered by the vast range of accessories : olives, sleeve nuts, reducers, tube adaptors.

All components conform to at least one of the following standards : **ISO, CETOP, AFNOR, CNOMO.**

fitting instructions

The Legris brass compression fitting comprises a body, olive and sleeve nut.

Cut the tube square, deburr inner and outer edges ; If required, any bending of the tube must be completed prior to connection.

Push the sleeve nut onto the tube. For large diameters, lubricate the inside of the nut to facilitate tightening.


Fit the olive onto the end of the tube, after the sleeve nut. Firmly push the tube fully home against the shoulder of the body of the fitting.

Tightening of the nut enables the olive to bite into the tube and secures the fully assembled fitting.

Technical specification

Details of fittings specifications for use with copper, brass, steel or nylon tubing can be found on page F4 and F5 of this section. Please consult us regarding applications which include thermal shocks or excessive vibration.

The table below shows the standard recommended compatibility of tube size, BSP male thread and maximum passage diameter.

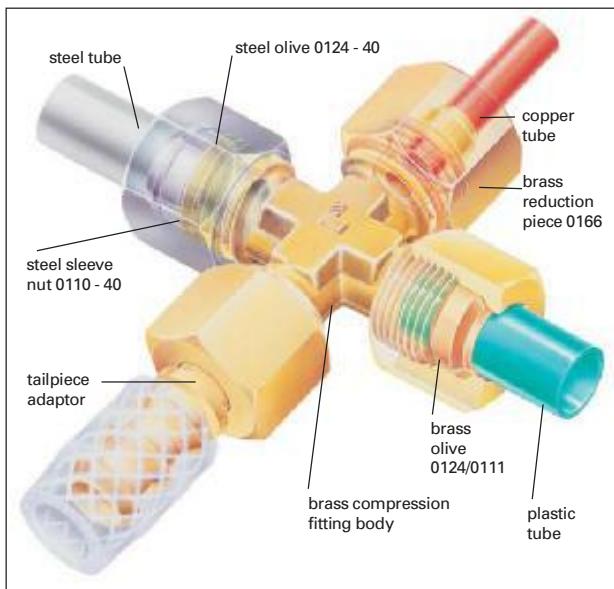


Ø tube o.d.	corresponding BSP thread	maximum passage (mm)
4-5-6	G1/8	4
6-8-10	G1/4	7
10-12-14	G3/8	11
14-15-16-18	G1/2	14
18-20-22	G3/4	18
22-25-28	G1"	24

Minimum tube length (L) required between two fittings

ØD (L)	ØD (L)	ØD (L)
4 26,5	12 39	20 51
5 26	14 41	22 54
6 26	15 41	25 62
8 32	16 46,5	28 62
10 39	18 49,5	

principle of brass compression fittings

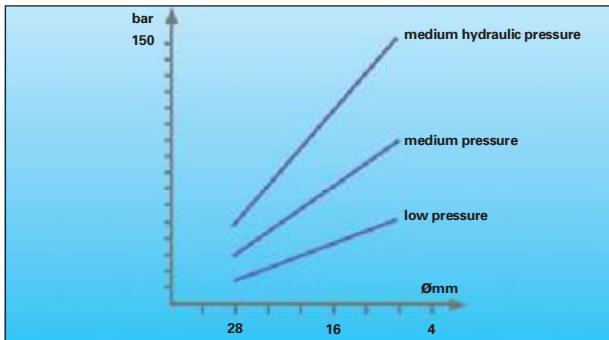

suitable for different pressure ranges

- low, medium compressed air pressure
- medium hydraulic pressure
- for compressed air, fuel oil, hydrocarbon, water...etc.

extensive connection in all industrial fields

- many connection possibilities
- direct assembly, without soldering or tubing preparation

a large range for many applications

- 18 different body configurations from 4 mm to 28 mm
- many accessories
- for use with :
 - BSP parallel threads with nitrile or bi-material seal
 - metric parallel threads
 - BSP taper threads
 - NPT threads

special products

Where a standard product is unsuitable, Legris is willing to develop special products for specific applications.



use to connect different types of tubing

- copper to brass
- plastic (nylon, polyurethane, fluoropolymer, PVC...)
- steel
- rubber

use to connect different diameter tubing

- with the Legris Reduction Assembly, different types and diameters of tubing can be easily connected.

barbed fittings

perfectly adapted to the requirements of industry :

- no tools are required and no nuts or collars to tighten
- connection to self-fastening tubing

technical specifications

To enable the user to obtain the best results from Legris brass compression fittings due regard to the application and tube used is necessary. As a guide the table below details the service pressures of the fitting assembly together with the service and burst pressures of various tubes. The pressures are

expressed in Bar or kg/cm and are provided in good faith – however they should be taken only as a guide and are not guaranteed.

type of tube			copper tube 'cold drawn' from straight bars			steel tube 'thin wall' unwelded cold drawn from annealed straight bars				
type of assembly		with brass nut and olive			with treated steel olive and nut (suffix 40)					
metric tube designation	tube dimensions		maximum pressure of fitting assembly	maximum service pressure of tube	burst pressure of tubes	continuous maximum service pressure	service pressure with intermittent surge	maximum intermittent surge pressure	maximum service pressure of tube	burst pressure of tube
	o.d.	wall thickness								
2 x 4	4	1	230	440	2 200	550	460	970	580	1 850
3 x 5	5	1	190	280	1 400	470	370	860	490	1 400
4 x 6	6	1	150	220	1 100	400	290	770	420	1 230
6 x 8	8	1	100	145	730	310	225	590	320	920
8 x 10	10	1	75	110	550	240	185	480	250	740
10 x 12	12	1	55	85	440	200	145	400	210	616
12 x 14	14	1	45	73	360	160	125	340	180	530
13 x 15	15	1	42	66	330	150	115	310	165	490
14 x 16	16	1	40	62	310	140	110	280	155	460
16 x 18	18	1	37	55	270	120	85	230	130	400
15,6 x 18	18	1,2	55	67	450					
18 x 20	20	1	35	45	240	100	70	190	110	340
17,6 x 20	20	1,2	50	60	300					
20 x 22	22	1	30	32	210	90	60	160	90	290
18,8 x 22	22	1,6	60	74	370					
23 x 25	25	1	20	30	180	70	40	115	70	240
21,8 x 25	25	1,6	55	64	320					
26 x 28	28	1	25	33	165					
24,8 x 28	28	1,6	40	56	280					
24 x 28	28	2	50	73	365					

brass tube : supplied in straight lengths : figures as above

copper tube : supplied in coils : **reduce the above service pressures by 35 %.**

Do not use in areas of vibration.

IMPORTANT : for use only on thin wall tubing from o.d. 6 mm to o.d. 16 mm - maximum wall thickness 1mm.
Above 16 mm maximum wall thickness 1,5 mm.

technical specifications

The table below is valid at 20° C.
For other temperatures apply the relevant coefficient.

temperature °C	- 40°C/ -15°C	- 15°C/ +30°C	+31°C/ +50°C	+51°C/ +70°C	+71°C/ +100°C
coefficient	1,8 not advised	1	0,68	0,55	0,31 not advised

type of tube

nylon tube (semi-rigid)

for rigid type, multiply figures by 1,8



metric tube designation	tube dimensions		maximum service pressure of fitting assembly	maximum service pressure of nylon tube	burst pressure of tube	maximum service pressure of fitting assembly	maximum service pressure of nylon tube	burst pressure of tube
	o.d.	wall thickness						
3 x 4	4	0,5	20	20	65	10	20	65
* 2,7 x 4	4	0,65	25	25	75	10	25	75
* 2 x 4	4	1	40	50	135	10	50	135
* 3,3 x 5	5	0,85	30	30	70			
* 4 x 6	6	1	32	32	85	10	32	85
* 6 x 8	8	1	22	22	58	10	22	58
* 8 x 10	10	1	16	16	42	10	16	42
* 7,5 x 10	10	1,25	23	23	57	10	23	57
* 10 x 12	12	1	12	12	32	10	12	32
* 9 x 12	12	1,5	22	22	63	10	22	63
* 12 x 14	14	1	10	10	27	10	10	27
* 11 x 14	14	1,5	16	16	52	10	16	52
10,4 x 14	14	1,8	22	22	66	10	22	66
12 x 15	15	1,5	14	14	48			
11 x 15	15	2	23	23	70			
* 13 x 16	16	1,5	12	12	44	10	12	44
12 x 16	16	2	21	21	66	10	21	66
14 x 18	18	2	17	17	58			
15 x 20	20	2,5	20	20	69			
16 x 22	22	3	21	21	75			
19 x 25	25	3	18	18	68			
23 x 28	28	2,5	16	16	50			
22 x 28	28	3	20	20	60			

*sizes marked are available from stock

Our brass compression fittings are not compatible with ammonia and its derivatives (ammonia fumes for example).

The above recommendations are given in good faith. However, since each application is different it is advisable to undertake tests in actual working conditions.

Legris brass compression fittings

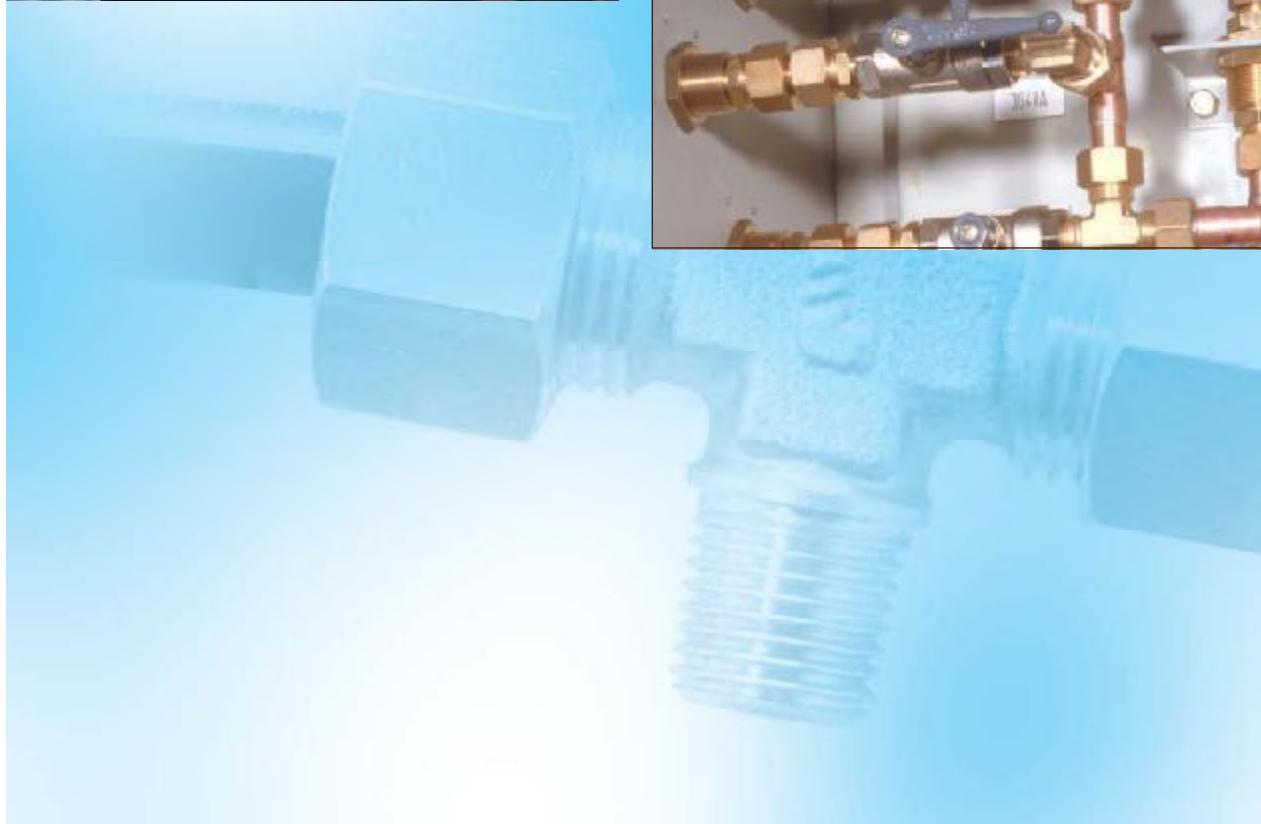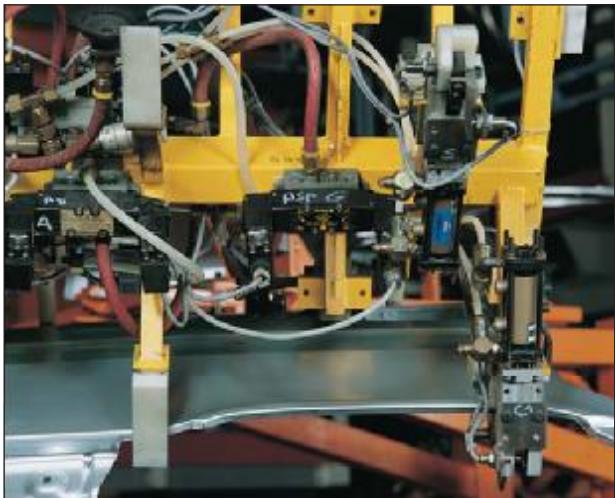

the complete range of brass compression fittings

stud couplings

0105
taper
Page G8



0105
NPT
Page G8



0101
metric
Page G9



0101
parallel
Page G9



0101...39
parallel
Page G10



0114
parallel
Page G10



0109
taper
Page G11



0199
parallel
Page G11



0109
NPT
Page G11



0108
taper
Page G12



0103
taper
Page G12



0118
parallel
Page G13



0118...39
parallel
Page G13



0119
parallel
Page G14



0119...39
parallel
Page G14



tube-to-tube couplings

0106
Page G15



0113
Page G15



0116
Page G15



0102
Page G15



0104
Page G16



0142
Page G16



0107
Page G16



complementary fittings

0166
Page G17



0124
0124...40
Page G19



0111
Page G19



0110
0110...40
0110...60
Page G19



0110...70
Page G19



accessories

0122
Page G20



0165
Page G20



0132
Page G21



0133...39
parallel
Page G21



0134
taper
Page G21



0126
Page G22



0125
parallel
Page G22

0220...39
parallel
Page G22



0127
Page G23



0120
taper
Page G23



0112
parallel
Page G23



0128...39
parallel
Page G24



0151
parallel
Page G24



0168...39
parallel
Page G24



stud couplings

0105 male stud coupling , BSP taper thread




brass

ØD	C	F	F1	H _{maxi}	H1	Δ_{kg}
4 R1/8	0105 04 10	10	10	17	7	0,013
5 R1/8	0105 05 10	11	12	17,5	7,5	0,017
5 R1/4	0105 05 13	14	12	17,5	7,5	0,022
6 R1/8	0105 06 10	11	13	18	7,5	0,017
6 R1/4	0105 06 13	14	13	18	7,5	0,024
6 R3/8	0105 06 17	17	13	19	8,5	0,031
8 R1/8	0105 08 10	13	14	19,5	7	0,021
8 R1/4	0105 08 13	14	14	19,5	7	0,026
8 R3/8	0105 08 17	17	14	20,5	8	0,032
10 R1/8	0105 10 10	17	19	24	9	0,043
10 R1/4	0105 10 13	17	19	24	9	0,047
10 R3/8	0105 10 17	17	19	24	9	0,048
10 R1/2	0105 10 21	22	19	25	10	0,067
12 R1/4	0105 12 13	19	22	24	9	0,059
12 R3/8	0105 12 17	19	22	24	9	0,061
12 R1/2	0105 12 21	22	22	25	10	0,076
14 R1/4	0105 14 13	22	24	25	8	0,067
14 R3/8	0105 14 17	22	24	25	8	0,069
14 R1/2	0105 14 21	22	24	26	9	0,079
14 R3/4	0105 14 27	27	24	27	10	0,105
15 R3/8	0105 15 17	22	24	25	8	0,064
15 R1/2	0105 15 21	22	24	26	9	0,075
16 R1/4	0105 16 13	24	27	27	9,5	0,091
16 R3/8	0105 16 17	24	27	27	9,5	0,092
16 R1/2	0105 16 21	24	27	27	9,5	0,100
16 R3/4	0105 16 27	27	27	28	10,5	0,120
18 R1/2	0105 18 21	27	30	30	10,5	0,130
18 R3/4	0105 18 27	27	30	30	10,5	0,140
20 R1/2	0105 20 21	30	32	32	11	0,148
20 R3/4	0105 20 27	30	32	32	11	0,156
22 R1/2	0105 22 21	32	36	33	11	0,180
22 R3/4	0105 22 27	32	36	33	11	0,193
22 R1"	0105 22 34	36	36	33	11	0,226
25 R3/4	0105 25 27	36	41	36	11	0,263
25 R1"	0105 25 34	36	41	36	11	0,277
28 R3/4	0105 28 27	41	42	36	11	0,272
28 R1"	0105 28 34	41	42	36	11	0,287

Metric taper threads or Briggs NPT threads are available to special order, subject to minimum quantities.

0105 male stud coupling, NPT thread

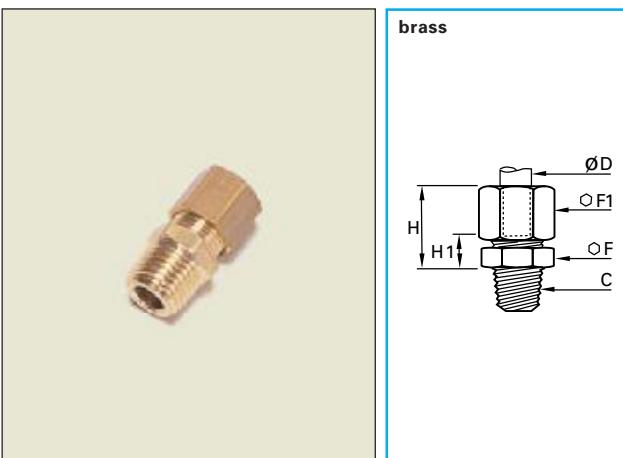

brass

ØD	C	F	F1	H _{maxi}	H1	Δ_{kg}
6 1/8	0105 06 11	11	13	18	7,5	0,018
6 1/4	0105 06 14	14	13	18	7,5	0,028
8 1/8	0105 08 11	13	14	21	7	0,021
8 1/4	0105 08 14	14	14	18,5	7	0,026
10 1/4	0105 10 14	17	19	24	9	0,047
10 3/8	0105 10 18	17	19	24	9	0,048
10 1/2	0105 10 22	22	19	25	10	0,067

stud couplings

0101 male stud coupling, parallel metric thread

brass			E	F	F1	H _{maxi}	H1	Δ_{kg}
4 M7x1	0101 04 55	6,5	10	10	16,5	7,5	0,013	
4 M8x1	0101 04 56	6,5	11	10	16,5	7,5	0,013	
5 M8x1	0101 05 56	6,5	11	12	17,5	8	0,016	
5 M10x1	0101 05 60	6,5	14	12	17,5	8,5	0,021	
6 M10x1	0101 06 60	6,5	14	13	18	8,5	0,022	
6 M10x1,5	0101 06 62	6,5	14	13	18	8,5	0,021	
8 M12x1	0101 08 65	8	17	14	19,5	9	0,031	
8 M12x1,25	0101 08 66	8	17	14	19,5	9	0,031	
8 M13x1,25	0101 08 68	8	17	14	19,5	9	0,032	
10 M14x1,25	0101 10 70	8	17	19	24	11	0,047	
10 M14x1,5	0101 10 71	8	17	19	24	11	0,047	
10 M16x1,25	0101 10 74	9	19	19	24	11	0,052	
10 M16x1,5	0101 10 75	9	19	19	24	11	0,054	
10 M18x1,5	0101 10 78	9	22	19	24	11,5	0,060	
12 M16x1,25	0101 12 74	9	19	22	24	11	0,062	
12 M16x1,5	0101 12 75	9	19	22	24	11	0,060	
12 M18x1,5	0101 12 78	9	22	22	24	11,5	0,070	
14 M18x1,5	0101 14 78	9	22	24	25	10,5	0,075	
14 M20x1,5	0101 14 80	10	24	24	25	11	0,085	
15 M18x1,5	0101 15 78	9	22	24	25	10,5	0,072	
16 M20x1,5	0101 16 80	10	24	27	27	12,5	0,104	
16 M22x1,5	0101 16 82	10	27	27	27	12,5	0,113	
18 M22x1,5	0101 18 82	10	27	30	29,5	12,5	0,131	
18 M24x1,5	0101 18 83	11	30	30	29,5	13	0,142	


0101 male stud coupling, BSP parallel or M5 thread

brass with pre-assembled washer			E	F	F1	H _{maxi}	H1	Δ_{kg}
4 M5X0,8	0101 04 19	5	10	10	16,5	8	0,012	
4 G1/8	0101 04 10	6,5	13	10	16,5	8	0,017	
5 G1/8	0101 05 10	6,5	13	12	17,5	8,5	0,019	
6 G1/8	0101 06 10	6,5	13	13	18	8,5	0,022	
6 G1/4	0101 06 13	8	17	13	18	9,5	0,034	
8 G1/8	0101 08 10	6,5	13	14	19	8,5	0,023	
8 G1/4	0101 08 13	8	17	14	19,5	9	0,034	
8 G3/8	0101 08 17	11	22	14	20	10,5	0,046	
10 G1/4	0101 10 13	8	17	19	24	11	0,049	
10 G3/8	0101 10 17	11	22	19	24	11,5	0,061	
12 G1/4	0101 12 13	8	19	22	24	11	0,062	
12 G3/8	0101 12 17	11	22	22	24	11,5	0,072	
12 G1/2	0101 12 21	12	27	22	24	12	0,090	
14 G3/8	0101 14 17	11	22	24	25	10,5	0,074	
14 G1/2	0101 14 21	12	27	24	25	11	0,097	
15 G3/8	0101 15 17	11	22	24	25	10,5	0,071	
15 G1/2	0101 15 21	12	27	24	25	11	0,112	
16 G3/8	0101 16 17	11	22	27	27	12	0,090	
16 G1/2	0101 16 21	12	27	27	27	12,5	0,110	
18 G1/2	0101 18 21	12	27	30	29,5	12,5	0,136	
18 G3/4	0101 18 27	13	32	30	29,5	13	0,153	
20 G3/4	0101 20 27	13	32	32	31	13	0,163	
22 G3/4	0101 22 27	13	32	36	32	13	0,195	
22 G1"	0101 22 34	15	41	36	31	13,5	0,260	
25 G3/4	0101 25 27	13	36	41	35,5	13	0,262	
25 G1"	0101 25 34	15	41	41	35,5	13	0,306	
28 G1"	0101 28 34	15	41	42	35,5	13,5	0,398	

The captive sealing washers 0602 are shown on page H16.


stud couplings

0101...39 male stud coupling, BSP parallel thread

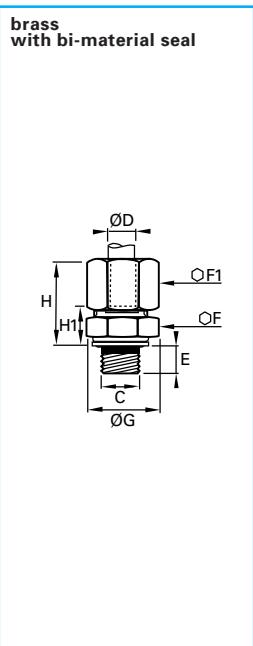

ØD	C	E	F	F1	G	H	H1	Δ_{kg}
4 G1/8	0101 04 10 39	5,5	13	10	14	17,5	9	0,017
5 G1/8	0101 05 10 39	5,5	13	12	14	18,5	9,5	0,019
6 G1/8	0101 06 10 39	5,5	13	13	14	19	9,5	0,022
6 G1/4	0101 06 13 39	7	17	13	17	19	10,5	0,034
8 G1/8	0101 08 10 39	5,5	13	14	14	20	9,5	0,023
8 G1/4	0101 08 13 39	7	17	14	17	20,5	10	0,034
8 G3/8	0101 08 17 39	9,5	22	14	22	21,5	12	0,046
10 G1/4	0101 10 13 39	7	17	19	17	25	12	0,049
10 G3/8	0101 10 17 39	9,5	22	19	22	25,5	13	0,061
12 G1/4	0101 12 13 39	7	19	22	17	25	12	0,062
12 G3/8	0101 12 17 39	9,5	22	22	22	25	13	0,072
12 G1/2	0101 12 21 39	10,5	27	22	26	25	13,5	0,090
14 G3/8	0101 14 17 39	9,5	22	24	22	26,5	12	0,074
14 G1/2	0101 14 21 39	10,5	27	24	26	26,5	12,5	0,097
15 G3/8	0101 15 17 39	9,5	22	24	22	26,5	12	0,071
15 G1/2	0101 15 21 39	10,5	27	24	26	26,5	12,5	0,112
16 G3/8	0101 16 17 39	9,5	22	27	22	28,5	13,5	0,090
16 G1/2	0101 16 21 39	10,5	27	27	26	28,5	14	0,110
18 G1/2	0101 18 21 39	10,5	27	30	26	31	14	0,136
18 G3/4	0101 18 27 39	11,5	32	30	32	31	14,5	0,153
20 G3/4	0101 20 27 39	11,5	32	32	32	32,5	14,5	0,163
22 G3/4	0101 22 27 39	11,5	32	36	32	33,5	14,5	0,195
22 G1"	0101 22 34 39	13	41	36	39,5	33	15,5	0,260
25 G3/4	0101 25 27 39	11,5	36	41	32	37	14,5	0,262
25 G1"	0101 25 34 39	13	41	41	39,5	37,5	15,5	0,306
28 G1"	0101 28 34 39	13	41	42	39,5	37,5	15,5	0,398


0114 female stud coupling, BSP parallel thread

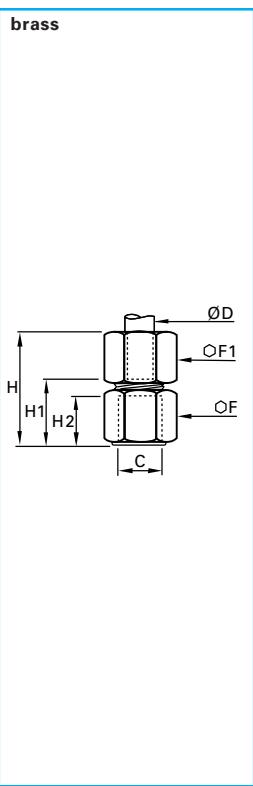

ØD	C	F	F1	H _{maxi}	H1	H2	Δ_{kg}
4 G1/8	0114 04 10	14	10	26	16,5	9,5	0,021
4 G1/4	0114 04 13	17	10	30	20,5	13,5	0,029
5 G1/8	0114 05 10	14	12	28	17	9,5	0,024
5 G1/4	0114 05 13	17	12	31	21	13,5	0,033
6 G1/8	0114 06 10	14	13	28	17	9,5	0,025
6 G1/4	0114 06 13	17	13	32	21	13,5	0,034
6 G3/8	0114 06 17	22	13	32	21,5	14	0,051
8 G1/8	0114 08 10	14	14	29	16,5	9,5	0,027
8 G1/4	0114 08 13	17	14	33	20,5	13,5	0,035
8 G3/8	0114 08 17	22	14	34	21	14	0,052
10 G1/4	0114 10 13	17	19	37	21,5	13,5	0,051
10 G3/8	0114 10 17	22	19	37	22	14	0,069
10 G1/2	0114 10 21	27	19	42	26,5	18,5	0,100
12 G1/4	0114 12 13	19	22	36	20,5	13,5	0,069
12 G3/8	0114 12 17	22	22	37	22	14	0,077
12 G1/2	0114 12 21	27	22	42	26,5	18,5	0,109
14 G1/4	0114 14 13	22	24	36	18,5	13,5	0,084
14 G3/8	0114 14 17	22	24	38	21	14	0,081
14 G1/2	0114 14 21	27	24	43	25,5	18,5	0,112
15 G3/8	0114 15 17	22	24	38	21	14	0,077
15 G1/2	0114 15 21	27	24	43	25,5	18,5	0,109
16 G1/4	0114 16 13	24	27	36	18	13,5	0,110
16 G3/8	0114 16 17	24	27	38	20,5	14	0,106
16 G1/2	0114 16 21	27	27	44	26	18,5	0,129
18 G3/8	0114 18 17	27	30	39	19,5	14	0,141
18 G1/2	0114 18 21	27	30	45	26	18,5	0,146
18 G3/4	0114 18 27	32	30	46	27	19,5	0,168
20 G3/8	0114 20 17	30	32	38	18	14	0,162
20 G1/2	0114 20 21	30	32	44,5	24	18,5	0,174
20 G3/4	0114 20 27	32	32	47	26,5	19,5	0,171
22 G3/4	0114 22 27	32	36	48	26,5	19,5	0,201
25 G3/4	0114 25 27	36	41	50,5	26	19,5	0,298

stud couplings


0109 male stud elbow, BSP taper thread

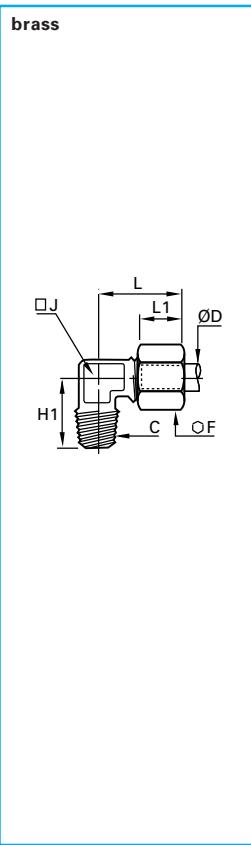

ØD	C	F	H1	J	L maxi	L1	Δkg
4 R1/8	0109 04 10	10	17	8	19	9,5	0,017
4 R1/4	0109 04 13	10	20	10	19	11	0,024
5 R1/8	0109 05 10	12	17,5	8	21	11	0,019
5 R1/4	0109 05 13	12	21,5	10	22	12	0,029
6 R1/8	0109 06 10	13	18	8	22	11	0,021
6 R1/4	0109 06 13	13	21,5	10	22	12	0,030
8 R1/8	0109 08 10	14	18,5	10	28	15	0,028
8 R1/4	0109 08 13	14	22	10	28	15	0,033
8 R3/8	0109 08 17	14	24	12	28	15	0,044
10 R1/4	0109 10 13	19	25	12	30	14,5	0,052
10 R3/8	0109 10 17	19	25,5	12	30	14,5	0,061
10 R1/2	0109 10 21	19	32	19	36	21	0,105
12 R1/4	0109 12 13	22	26	15	30	15	0,074
12 R3/8	0109 12 17	22	27	15	30	15	0,077
12 R1/2	0109 12 21	22	32	19	36	21	0,117
14 R3/8	0109 14 17	24	30	19	35	18	0,103
14 R1/2	0109 14 21	24	32	19	35	18	0,107
15 R3/8	0109 15 17	24	30	19	35	18	0,104
15 R1/2	0109 15 21	24	32	19	35	18	0,104
16 R3/8	0109 16 17	27	30	19	39	21	0,118
16 R1/2	0109 16 21	27	33,5	19	39	21	0,134
16 R3/4	0109 16 27	27	36,5	23	41	23	0,186
18 R1/2	0109 18 21	30	35,5	23	41	21,5	0,175
18 R3/4	0109 18 27	30	36,5	23	41	21,5	0,201
20 R1/2	0109 20 21	32	36,5	23	42	21,5	0,174
20 R3/4	0109 20 27	32	38	23	42	21,5	0,274
22 R3/4	0109 22 27	36	40	27	50	30	0,294
22 R1"	0109 22 34	36	44	27	50	30	0,322
25 R3/4	0109 25 27	41	43	27	54	30	0,330
25 R1"	0109 25 34	41	44	27	54	30	0,360
28 R3/4	0109 28 27	42	46	32	54	30	0,364
28 R1"	0109 28 34	42	48	32	54	30	0,380


Metric taper threads or Briggs NPT threads are available to special order, subject to minimum quantities.

0199 male stud orientable elbow, BSP parallel thread

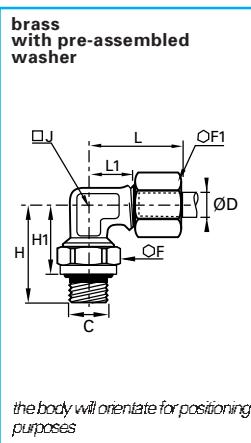

ØD	C	F	G	F1	H	H1 mini maxi	J	L	L1	Δkg	
4 G1/8	0199 04 10	14	15	10	23	16	17	8	19	9,5	0,017
4 G1/4	0199 04 13	19	21	10	30,5	22	23,5	10	19	11	0,024
6 G1/8	0199 06 10	14	15	13	23	16	17	8	22	11	0,021
6 G1/4	0199 06 13	19	21	13	30,5	22	23,5	10	22	12	0,030
8 G1/8	0199 08 10	14	15	14	24	17	18	10	28	15	0,028
8 G1/4	0199 08 13	19	21	14	30,5	22	23,5	10	28	15	0,033
8 G3/8	0199 08 17	22	24	14	33,5	24	25,5	12	28	15	0,044
10 G1/4	0199 10 13	19	21	19	31	22,5	24	12	30	14,5	0,052
10 G3/8	0199 10 17	22	24	19	33,5	24	25,5	12	30	14,5	0,061
10 G1/2	0199 10 21	27	29,5	19	40	39,5	31	19	37	22	0,105
14 G3/8	0199 14 17	22	24	24	35,5	26	27,5	19	35	18	0,103
14 G1/2	0199 14 21	27	29,5	24	40	29,5	31	19	35	18	0,107
18 G1/2	0199 18 21	27	29,5	30	40	29	30,5	23	41	21,5	0,175
18 G3/4	0199 18 27	32	35	30	43,5	32	33,5	23	41	21,5	0,201
22 G3/4	0199 22 27	32	35	36	45,5	34	36	32	51	31	0,294
22 G1"	0199 22 34	41	45	36	54	40,5	43	32	51	31	0,322
28 G1"	0199 28 34	41	45	42	54	40,5	43	32	54	30	0,380


0109 male stud elbow, NPT thread

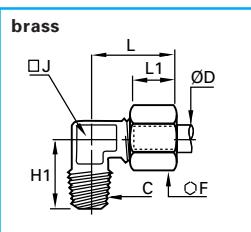

ØD	C	F	H1	J	L maxi	L1	Δkg
6 1/8	0109 06 11	13	18	8	22	11	0,021
6 1/4	0109 06 14	13	21,5	10	22	12	0,030
8 1/8	0109 08 11	14	18,5	10	28	15	0,028
8 1/4	0109 08 14	14	22	10	28	15	0,033
10 1/4	0109 10 14	19	25	12	30	14,5	0,052

stud couplings


0108 male stud branch tee, BSP taper thread

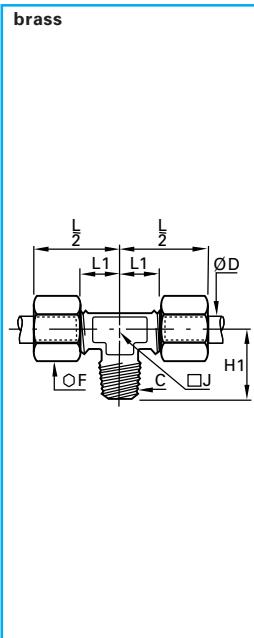

$\varnothing D$	C		F	H1	J	$\frac{L}{2}$	L1	Δ_{kg}
4 R1/8	0108 04 10		10	17	8	19	9,5	0,026
5 R1/8	0108 05 10		12	17,5	8	21	11	0,031
6 R1/8	0108 06 10		13	18	8	22	11	0,033
6 R1/4	0108 06 13		13	21,5	10	27	16	0,050
8 R1/8	0108 08 10		14	18,5	10	28	15	0,046
8 R1/4	0108 08 13		14	22	10	28	15	0,049
8 R3/8	0108 08 17		14	24	12	28	15	0,063
10 R1/4	0108 10 13		19	25	12	30	14,5	0,085
10 R3/8	0108 10 17		19	25,5	12	30	14,5	0,093
12 R1/4	0108 12 13		22	26	15	30	15	0,115
12 R3/8	0108 12 17		22	27	15	30	15	0,118
14 R3/8	0108 14 17		24	30	19	35	18	0,156
14 R1/2	0108 14 21		24	32	19	35	18	0,193
15 R3/8	0108 15 17		24	30	19	35	18	0,145
15 R1/2	0108 15 21		24	32	19	35	18	0,156
16 R3/8	0108 16 17		27	30	19	39	21	0,190
16 R1/2	0108 16 21		27	33,5	19	39	21	0,200
18 R1/2	0108 18 21		30	35,5	23	41	21,5	0,264
18 R3/4	0108 18 27		30	36,5	23	41	21,5	0,270
20 R3/4	0108 20 27		32	38	23	42	21,5	0,280
22 R3/4	0108 22 27		36	40	27	50	29	0,440
22 R1"	0108 22 34		36	44	27	50	29	0,477

Metric taper threads or Briggs NTP threads are available to special order, subject to minimum quantities.

0103 male stud run tee, BSP taper thread

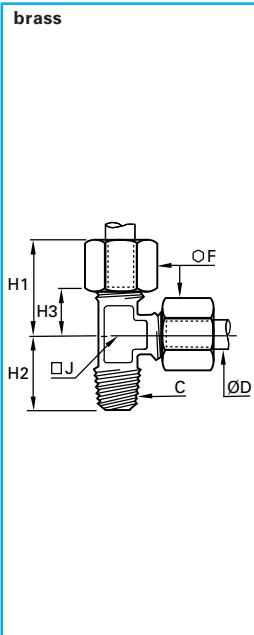


$\varnothing D$	C		F	H1 maxi	H2	H3	J	Δ_{kg}
4 R1/8	0103 04 10		10	19	17	9,5	8	0,026
5 R1/8	0103 05 10		12	21	17,5	11	8	0,031
6 R1/8	0103 06 10		13	22	18	11	8	0,031
6 R1/4	0103 06 13		13	27	21,5	16	10	0,049
8 R1/8	0103 08 10		14	28	18,5	15	10	0,044
8 R1/4	0103 08 13		14	28	22	15	10	0,050
8 R3/8	0103 08 17		14	28	24	15	12	0,062
10 R1/4	0103 10 13		19	30	25	14,5	12	0,085
10 R3/8	0103 10 17		19	30	25,5	14,5	12	0,092
12 R1/4	0103 12 13		22	30	26	15	15	0,113
12 R3/8	0103 12 17		22	30	27	15	15	0,120
14 R3/8	0103 14 17		24	35	30	18	19	0,156
14 R1/2	0103 14 21		24	35	32	18	19	0,166
15 R3/8	0103 15 17		24	35	30	18	19	0,141
15 R1/2	0103 15 21		24	35	32	18	19	0,151
16 R3/8	0103 16 17		27	39	30	21	19	0,189
16 R1/2	0103 16 21		27	39	33,5	21	19	0,199
18 R1/2	0103 18 21		30	41	35,5	21,5	23	0,263
18 R3/4	0103 18 27		30	41	36,5	21,5	23	0,281
20 R3/4	0103 20 27		32	42	38	21,5	23	0,295
22 R3/4	0103 22 27		36	50	40	29	27	0,428

Metric taper threads or Briggs NPT threads are available to special order, subject to minimum quantities.

stud couplings


0118 single banjo, BSP parallel thread

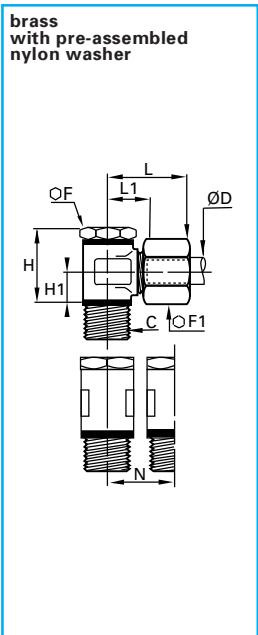

$\varnothing D$	C	F	F1	H	H1	L	L1	N	Δkg
4 G1/8	0118 04 10	14	10	24	9,5	24	14,5	17,5	0,039
5 G1/8	0118 05 10	14	12	24	9,5	25	14,5	17,5	0,042
5 G1/4	0118 05 13	17	12	25	10	26	16	21	0,056
6 G1/8	0118 06 10	14	13	24	9,5	25	14,5	17,5	0,043
6 G1/4	0118 06 13	17	13	25	10	26	16	21	0,056
8 G1/8	0118 08 10	14	14	24	9,5	28	15,5	17,5	0,054
8 G1/4	0118 08 13	17	14	25	10	28	15,5	21	0,057
8 G3/8	0118 08 17	22	14	32	13	30	18	26,5	0,112
10 G1/4	0118 10 13	17	19	31	13	34	19	23	0,117
10 G3/8	0118 10 17	22	19	32	13	34	19	26,5	0,126
12 G1/4	0118 12 13	17	22	34	14,5	34	19	23	0,128
12 G3/8	0118 12 17	22	22	35	14,5	34	19	26,5	0,134
14 G1/4	0118 14 13	17	24	37	16	37	20,5	28	0,188
14 G3/8	0118 14 17	22	24	38	16	37	20,5	28	0,194
14 G1/2	0118 14 21	27	24	40	16	38	20,5	32,5	0,208
15 G3/8	0118 15 17	22	24	38	16	37	20,5	28	0,188
15 G1/2	0118 15 21	27	24	40	16	38	20,5	32,5	0,198
16 G1/2	0118 16 21	27	27	42	16	38	21	32,5	0,226
18 G1/2	0118 18 21	27	30	46	19,5	43	24,5	36	0,375
20 G3/4	0118 20 27	32	32	49	20	44	24,5	39	0,383
22 G3/4	0118 22 27	32	36	53	22	45	24,5	39	0,455

Subject to minimum quantities these products can be made with a metric thread.

0118...39 single banjo, BSP parallel thread

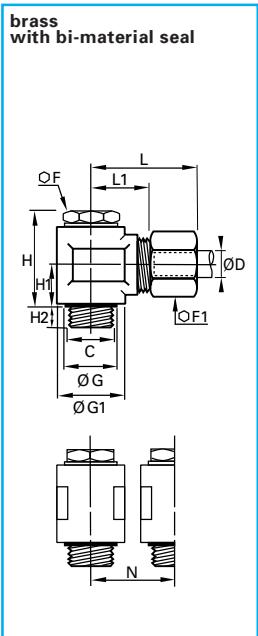


$\varnothing D$	C	F	F1	G	G1	H	H1	H2	L	L1	N	Δkg
4 G1/8	0118 04 10 39	14	10	14	14	23	9,5	6,5	24	14,5	17,5	0,042
5 G1/8	0118 05 10 39	14	12	14	14	23	9,5	6,5	25	14,5	17,5	0,044
5 G1/4	0118 05 13 39	17	12	17	17	24	10	8	26	16	21	0,060
6 G1/8	0118 06 10 39	14	13	14	14	23	9,5	6,5	25	14,5	17,5	0,045
6 G1/4	0118 06 13 39	17	13	17	17	24	10	8	26	16	21	0,060
8 G1/8	0118 08 10 39	14	14	14	17	23	9,5	6,5	28	15,5	17,5	0,057
8 G1/4	0118 08 13 39	17	14	17	17	24	10	8	28	15,5	21	0,062
8 G3/8	0118 08 17 39	22	14	22	22	31,5	13,5	7,5	30	18	26,5	0,115
10 G1/4	0118 10 13 39	17	19	17	22	30	13	7,5	34	19	23	0,120
10 G3/8	0118 10 17 39	22	19	22	22	31,5	13,5	7,5	34	19	26,5	0,129
12 G1/4	0118 12 13 39	17	22	17	22	33	14,5	8	34	19	23	0,130
12 G3/8	0118 12 17 39	22	22	22	22	34,5	15	10,5	34	19	26,5	0,136
14 G1/4	0118 14 13 39	17	24	17	27	36	16	8	37	20,5	28	0,191
14 G3/8	0118 14 17 39	22	24	22	27	37,5	16,5	8,5	37	20,5	28	0,198
14 G1/2	0118 14 21 39	27	24	26	27	39	16,5	10	38	20,5	32,5	0,212
15 G3/8	0118 15 17 39	22	24	22	27	37,5	16,5	8,5	37	20,5	28	0,191
15 G1/2	0118 15 21 39	27	24	26	27	40	16,5	10	38	20,5	32,5	0,201
16 G1/2	0118 16 21 39	27	27	26	27	40	16,5	10	38	21	32,5	0,230
18 G1/2	0118 18 21 39	27	30	26	34	47	20	9	43	24,5	36	0,379
20 G3/4	0118 20 27 39	32	32	32	34	50	20,5	13	44	24,5	39	0,386
22 G3/4	0118 22 27 39	32	36	32	34	54	22,5	12	45	24,5	39	0,455

Refer to page H16 for details of sealing washer 0602 used on banjos 0118.

Length of parallel threads for part nos. 0118		C	G1/8	G1/4	G3/8	G1/2	G3/4
		E	4,5	6	8	9	10

stud couplings


0119 double banjo, BSP parallel thread

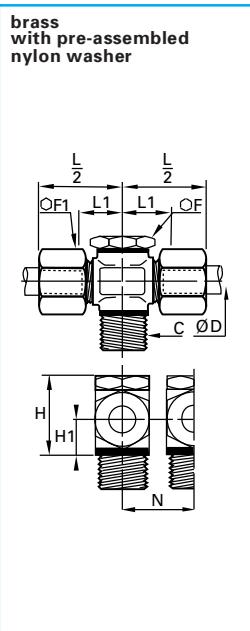

$\varnothing D$	C	F	F1	H	H1	$\frac{L}{2}$	L1	N mini	Δkg
4 G1/8	0119 04 10	14	10	24	9,5	24	14,5	17,5	0,048
6 G1/8	0119 06 10	14	13	24	9,5	25	14,5	17,5	0,055
6 G1/4	0119 06 13	17	13	25	10	26,5	16	21	0,071
8 G1/8	0119 08 10	14	14	24	9,5	28	15,5	17,5	0,071
8 G1/4	0119 08 13	17	14	25	10	28	15,5	21	0,074
8 G3/8	0119 08 17	22	14	32	13	30,5	18	26,5	0,139
10 G1/4	0119 10 13	17	19	31	13	34	19	23	0,156
10 G3/8	0119 10 17	22	19	32	13	34	19	26,5	0,171
12 G1/4	0119 12 13	17	22	34	14,5	34	19	23	0,156
12 G3/8	0119 12 17	22	22	35	14,5	34	19	26,5	0,181
14 G1/4	0119 14 13	17	24	37	16	37,5	20,5	28	0,248
14 G3/8	0119 14 17	22	24	38	16	37,5	20,5	28	0,243
14 G1/2	0119 14 21	27	24	40	16	38	20,5	32,5	0,257
16 G1/2	0119 16 21	27	27	42	16	38,5	21	32,5	0,295

Subject to minimum quantities these products can be made with a metric thread.


0119...39 double banjo, BSP parallel thread

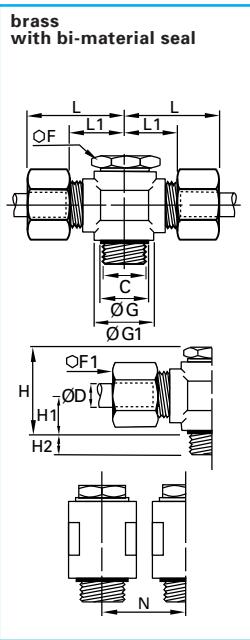

$\varnothing D$	C	F	F1	G	G1	H	H1	H2	L	L1	N	Δkg
4 G1/8	0119 04 10 39	14	10	14	14	23	9,5	6,5	24	14,5	17,5	0,049
5 G1/8	0119 05 10 39	14	12	14	14	23	9,5	6,5	25	14,5	17,5	0,049
5 G1/4	0119 05 13 39	17	12	17	17	24	10	8	26	16	21	0,051
6 G1/8	0119 06 10 39	14	13	14	14	23	9,5	6,5	25	14,5	17,5	0,055
6 G1/4	0119 06 13 39	17	13	17	17	24	10	8	26	16	21	0,071
8 G1/8	0119 08 10 39	14	14	17	23	9,5	6,5	28	15,5	17,5	0,071	
8 G1/4	0119 08 13 39	17	14	17	24	10	8	28	15,5	21	0,074	
8 G3/8	0119 08 17 39	22	14	22	22	31,5	13,5	7,5	30	18	26,5	0,139
10 G1/4	0119 10 13 39	17	19	17	22	30	13	7,5	34	19	23	0,156
10 G3/8	0119 10 17 39	22	19	22	22	31,5	13,5	7,5	34	19	26,5	0,171
12 G1/4	0119 12 13 39	17	22	17	22	33	14,5	8	34	19	23	0,156
12 G3/8	0119 12 17 39	22	22	22	22	34,5	15	10,5	34	19	26,5	0,181
14 G1/4	0119 14 13 39	17	24	17	27	36	16	8	37	20,5	28	0,248
14 G3/8	0119 14 17 39	22	24	22	27	37,5	16,5	8,5	37	20,5	28	0,243
14 G1/2	0119 14 21 39	27	24	26	27	39	16,5	10	38	20,5	32,5	0,257
15 G3/8	0119 15 17 39	22	24	22	27	37,5	16,5	8,5	37	20,5	28	0,270
15 G1/2	0119 15 21 39	27	24	26	27	40	16,5	10	38	20,5	32,5	0,278
16 G1/2	0119 16 21 39	27	27	26	27	40	16,5	10	38	21	32,5	0,295
18 G1/2	0119 18 21 39	27	30	26	34	47	20	9	43	24,5	36	0,312
20 G3/4	0119 20 27 39	32	32	32	34	50	20,5	13	44	24,5	39	0,320
22 G3/4	0119 22 27 39	32	36	32	34	54	22,5	12	45	24,5	39	0,330

Refer to page H16 for details of sealing washer 0602 used on banjos 0119.


Length of parallel threads for part numbers 0119.



C	G1/8	G1/4	G3/8	G1/2	G3/4
E	4,5	6	8	9	10


tube-to-tube couplings

0106 equal ended straight coupling

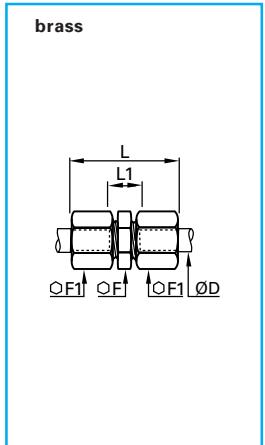


$\varnothing D$		F	F1	L_{maxi}	L1	$\Delta kg \Delta$
4	0106 04 00	10	10	28	10	0,017
5	0106 05 00	11	12	31	11	0,024
6	0106 06 00	11	13	32	11	0,026
8	0106 08 00	13	14	36	10	0,031
10	0106 10 00	17	19	42	13	0,070
12	0106 12 00	19	22	42	13	0,092
14	0106 14 00	22	24	45	11	0,096
15	0106 15 00	22	24	45	11	0,104
16	0106 16 00	24	27	48	13	0,142
18	0106 18 00	27	30	53	14	0,191
20	0106 20 00	30	32	56	14	0,216
22	0106 22 00	32	36	60	14	0,280
25	0106 25 00	36	41	64	14	0,398
28	0106 28 00	42	41	64	14	0,400

0113 straight coupling with mounting boss

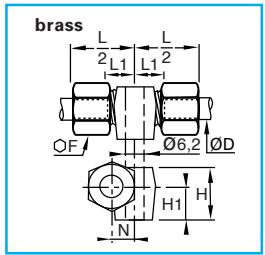


$\varnothing D$		F	H	H1	$\frac{L}{2}$	L1	N	$\Delta kg \Delta$
4	0113 04 00	10	10,5	7	19	9,5	6	0,022
6	0113 06 00	13	13	9	20,5	10	7	0,033
8	0113 08 00	14	14,5	9,5	23,5	11	8	0,040
10	0113 10 00	19	19,5	12,5	26	11	9	0,081
12	0113 12 00	22	22	14	26,5	12	11	0,109
14	0113 14 00	24	25	16	28	11	12	0,122

0116 bulkhead coupling

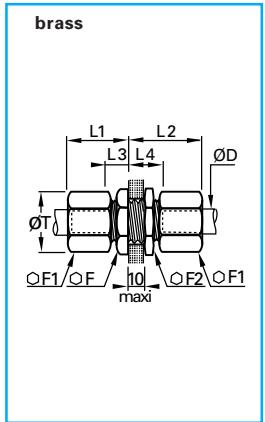

$\varnothing D$		F	F1	F2	$L1_{maxi}$	$L2_{maxi}$	L3	L4	T _{mini}	$\Delta kg \Delta$
4	0116 04 00	10	10	13	17	27	7	17	8,3	0,024
5	0116 05 00	13	12	14	18	28	7,5	17,5	10,3	0,035
6	0116 06 00	13	13	14	19	28	7,5	17,5	10,3	0,037
8	0116 08 00	14	14	17	20	29	7	17	12,3	0,047
10	0116 10 00	19	19	22	25	33	9	19	16,5	0,101
12	0116 12 00	22	22	22	25	33	9	19	18,5	0,125
14	0116 14 00	24	24	24	25	35	8	18	20,5	0,143
15	0116 15 00	24	24	24	25	35	8	18	20,5	0,133
16	0116 16 00	27	27	27	28	36	9,5	19,5	22,5	0,191
18	0116 18 00	27	30	30	30	40	10,5	20,5	24,5	0,244
20	0116 20 00	32	30	32	31	41	11	21	27,5	0,268
22	0116 22 00	36	36	36	32	42	11	21	30,5	0,372
25	0116 25 00	36	41	38	36	46	11	21	33,5	0,475


0102 equal elbow

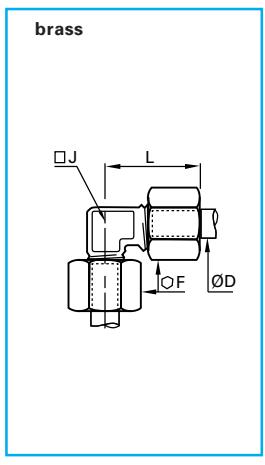

$\varnothing D$		F	J	L_{maxi}	$\Delta kg \Delta$
4	0102 04 00	10	5	19	0,017
5	0102 05 00	12	8	21	0,024
6	0102 06 00	13	8	22	0,027
8	0102 08 00	14	10	28	0,038
10	0102 10 00	19	12	30	0,072
12	0102 12 00	22	15	30	0,097
14	0102 14 00	24	19	35	0,131
15	0102 15 00	24	19	35	0,119
16	0102 16 00	27	19	39	0,164
18	0102 18 00	30	23	41	0,230
20	0102 20 00	32	23	42	0,236
22	0102 22 00	36	27	50	0,376
25	0102 25 00	41	27	54	0,464
28	0102 28 00	42	32	54,5	0,460


tube-to-tube couplings

0104 equal tee

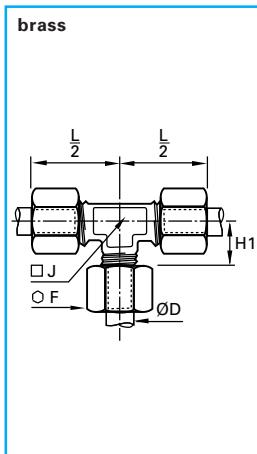


$\varnothing D$		F	H1	J	$\frac{L}{2}$	$\Delta kg \Delta$
4	0104 04 00	10	9,5	8	19	0,029
5	0104 05 00	12	11	8	21	0,035
6	0104 06 00	13	11	8	22	0,040
8	0104 08 00	14	15	10	28	0,055
10	0104 10 00	19	14,5	12	30	0,103
12	0104 12 00	22	15	15	30	0,139
14	0104 14 00	24	18	19	35	0,188
15	0104 15 00	24	18	19	35	0,168
16	0104 16 00	27	21	19	39	0,236
18	0104 18 00	30	21,5	23	41	0,322
20	0104 20 00	32	21,5	23	42	0,324
22	0104 22 00	36	29	27	50	0,518
25	0104 25 00	41	29	27	54	0,646
28	0104 28 00	42	30	32	55	0,650

0142 equal Y piece

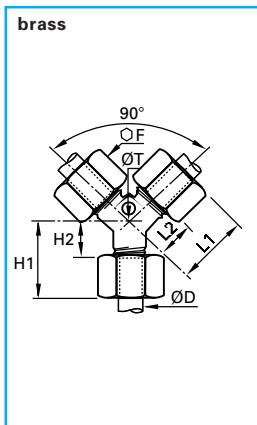

$\varnothing D$		F	H1 maxi	H2	L1 maxi	L2	T	$\Delta kg \Delta$
4	0142 04 00	10	16,5	7	26,5	17	4,2	0,032
5	0142 05 00	12	18,5	8,5	27	17	4,2	0,046
6	0142 06 00	13	19,5	8,5	28	17	4,2	0,050
8	0142 08 00	14	21	8	30	17	6,2	0,062
10	0142 10 00	19	24,5	9	37,5	22	6,2	0,130
12	0142 12 00	22	26	11	38	23	6,2	0,171
14	0142 14 00	24	28	11	41,5	24,5	6,2	0,199
15	0142 15 00	24	28	11	41,5	24,5	6,2	0,177
16	0142 16 00	27	30	12	43	25	6,2	0,257
18	0142 18 00	30	31,5	12	50,5	31	10,2	0,350
20	0142 20 00	32	33,5	13	51,5	31	10,2	0,410
22	0142 22 00	36	34	13	53	32	10,2	0,543
25	0142 25 00	41	39	14	59	34	10,2	0,728

0107 equal cross

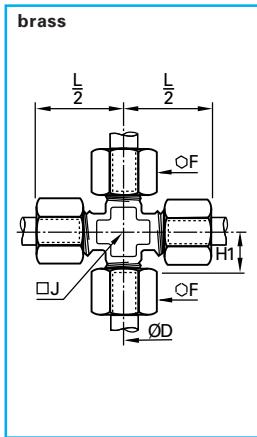

$\varnothing D$		F	H1	J	$\frac{L}{2}$	$\Delta kg \Delta$
4	0107 04 00	10	9,5	8	19	0,037
5	0107 05 00	12	11	8	21	0,048
6	0107 06 00	13	11	8	22	0,053
8	0107 08 00	14	15	11	28	0,074
10	0107 10 00	19	14,5	14	30	0,143
12	0107 12 00	22	15	15	30	0,185
14	0107 14 00	24	18	20	35	0,241
15	0107 15 00	24	18	20	35	0,223
16	0107 16 00	27	21	20	39	0,311
18	0107 18 00	30	21,5	25	41	0,431
20	0107 20 00	32	21,5	25	42	0,442
22	0107 22 00	36	29	27	50	0,682
25	0107 25 00	41	29	27	50	0,811

complementary fittings

the Legris reduction assembly

This patented accessory enables a smaller tube size to be used with the standard Legris coupling designed for larger sized tube. Tube may be copper, brass, nylon, thin wall steel (wall thickness $\leq 1\text{mm}$).

For example the following can be connected to a 14 mm equal cross connector :

- a 4 mm nylon tube
- a 8 mm copper tube
- a 12 mm brass tube
- a 14 mm braided PVC hose

The Legris reduction assembly

- allows a lower stockholding of fittings (57 alternative reductions are available).
- enables less complicated system designs.
- allows connection of several tube diameters within one fitting.

Legris reducers may be used with the 0122 tailpiece adaptor for rubber hose, the 0165 tailpiece adaptor for nylon hose and blanking plug 0126.

The reduction assembly comprises three components.

① the reduction piece,




which fits inside the fitting body.



② the universal compression olive which fits on the end of the tube and is inserted between the reduction piece and the sleeve nut.




③ the brass sleeve nut

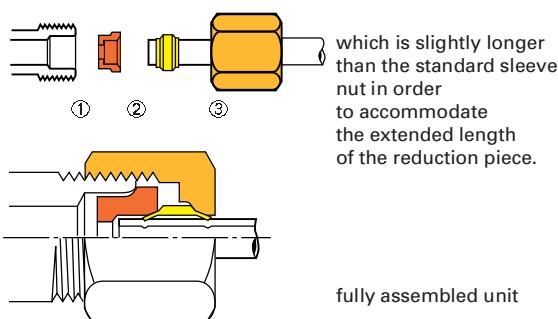

fully assembled unit

0166 reduction assembly

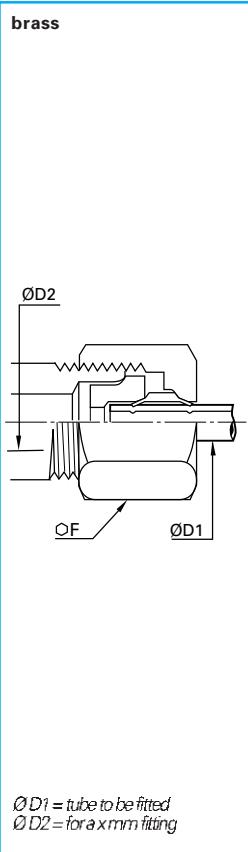

brass

$\varnothing D1$	$\varnothing D2$	F	$\Delta kg\Delta$	$\varnothing D1$	$\varnothing D2$	F	$\Delta kg\Delta$		
4	5	0166 04 05	13	0,011	16	18	0166 16 18	30	0,078
5	6	0166 05 06	13	0,011	15	18	0166 15 18	30	0,080
4	6	0166 04 06	13	0,011	14	18	0166 14 18	30	0,084
6	8	0166 06 08	14	0,012	12	18	0166 12 18	30	0,090
5	8	0166 05 08	14	0,013	10	18	0166 10 18	30	0,097
4	8	0166 04 08	14	0,014	8	18	0166 08 18	30	0,099
8	10	0166 08 10	19	0,027	18	20	0166 18 20	32	0,080
6	10	0166 06 10	19	0,030	16	20	0166 16 20	32	0,089
5	10	0166 05 10	19	0,030	14	20	0166 14 20	32	0,097
4	10	0166 04 10	19	0,031	12	20	0166 12 20	32	0,102
10	12	0166 10 12	22	0,037	10	20	0166 10 20	32	0,104
8	12	0166 08 12	22	0,040	18	22	0166 18 22	36	0,120
6	12	0166 06 12	22	0,043	16	22	0166 16 22	36	0,122
5	12	0166 05 12	22	0,044	15	22	0166 15 22	36	0,130
4	12	0166 04 12	22	0,045	14	22	0166 14 22	36	0,132
12	14	0166 12 14	24	0,043	12	22	0166 12 22	36	0,135
10	14	0166 10 14	24	0,046	10	22	0166 10 22	36	0,145
8	14	0166 08 14	24	0,051	20	25	0166 20 25	41	0,166
6	14	0166 06 14	24	0,051	18	25	0166 18 25	41	0,178
5	14	0166 05 14	24	0,053	16	25	0166 16 25	41	0,174
4	14	0166 04 14	24	0,054	14	25	0166 14 25	41	0,190
12	15	0166 12 15	24	0,045	12	25	0166 12 25	41	0,195
10	15	0166 10 15	24	0,048	10	25	0166 10 25	41	0,205
8	15	0166 08 15	24	0,053	22	28	0166 22 28	42	0,169
6	15	0166 06 15	24	0,055	18	28	0166 18 28	42	0,180
4	15	0166 04 15	24	0,058					
14	16	0166 14 16	27	0,060					
12	16	0166 12 16	27	0,072					
10	16	0166 10 16	27	0,069					
8	16	0166 08 16	27	0,076					
6	16	0166 06 16	27	0,078					
5	16	0166 05 16	27	0,077					

Each of the above part numbers comprises :

- a reduction piece
- an olive : ref 0124
- a sleeve nut : ref 0110

brass olives and sleeve nuts

The table below illustrates the wide number of possible combinations available when using the Legris brass compression range.

In addition the advantages of the **Legris** reduction assembly are shown on page F17.

brass fitting body					
0110 brass		0110... 60 brass		0110... 40 steel	
0124 brass	0111 brass BNA	0124 brass	0111 brass BNA	0124... 40 steel	0110... 70 plastic
brass tube, plastic tube, copper tube and barbed fitting 0122 and 0165	copper tube	soft copper tube subjected to vibration and lateral forces	half hard copper tube subjected to vibration and lateral forces	steel tube : low and medium pressure hydraulics	plastic tubes



0124

This type of brass olive is supplied as standard and is for use with sleeve nut **0110**. This 'nut and olive' assembly is suitable for connecting copper, brass, thin walled steel, and plastic tube as well as **0122** and **0165** tube adaptors.



0124... 40

This steel olive is for use with hydraulic fluids. It is used with the sleeve nut reference **0110...suffix 40**. This 'nut and olive' assembly is suitable for medium pressure hydraulics (see page F4)



0111

This brass olive conforms to BNA 34-E-29601. It is assembled with a sleeve nut **0110** and is suitable for copper tube.



0110/0110... 40

Brass nut **0110** is used with brass olive **0124**, or **0111** or blanking plug **0126**. Steel nut **0110...suffix 40** is used with steel olive **0124...suffix 40**. It is recommended to lubricate threads and components.



0110... 60

The use of this nut improves the grip on soft copper tube and on all fittings which may be subjected to relatively large vibrations or abnormal lateral forces. Nut **0110...suffix 60** should be used with olives **0124** or **0111**.




0110... 70

This product acts as both nut and olive when used with soft plastic tubing
 1 - manually tighten the **0110...70** several times on to the fitting
 2 - push home the plastic tube through the nut/olive
 3 - manually fully tighten the plastic nut/olive

The above recommendations are given in good faith. However, since each application is different it is advisable to undertake tests in actual working conditions.



complementary fittings

0124, 0124 suffix 40, 0111 olives

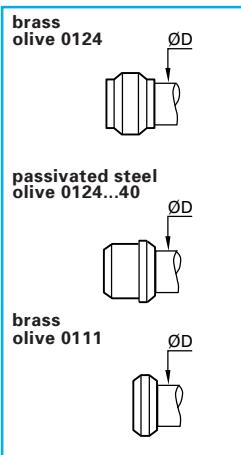

ØD		Δkg		Δkg		Δkg
4	0124 04 00	0,001	0124 04 00 40	0,001	0111 04 00	0,001
5	0124 05 00	0,001	0124 05 00 40	0,001	0111 05 00	0,001
6	0124 06 00	0,001	0124 06 00 40	0,001	0111 06 00	0,001
8	0124 08 00	0,002	0124 08 00 40	0,002	0111 08 00	0,002
10	0124 10 00	0,003	0124 10 00 40	0,003	0111 10 00	0,002
12	0124 12 00	0,004	0124 12 00 40	0,004	0111 12 00	0,003
14	0124 14 00	0,004	0124 14 00 40	0,005	0111 14 00	0,003
15	0124 15 00	0,004	0124 15 00 40	0,005	0111 15 00	0,003
16	0124 16 00	0,006	0124 16 00 40	0,006	0111 16 00	0,004
18	0124 18 00	0,007	0124 18 00 40	0,008		
20	0124 20 00	0,009	0124 20 00 40	0,008		
22	0124 22 00	0,012	0124 22 00 40	0,010		
25	0124 25 00	0,017	0124 25 00 40	0,015		
28	0124 28 00	0,017				

0110, 0110 suffix 40, 0110 suffix 60 nuts

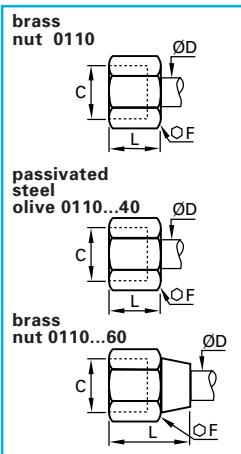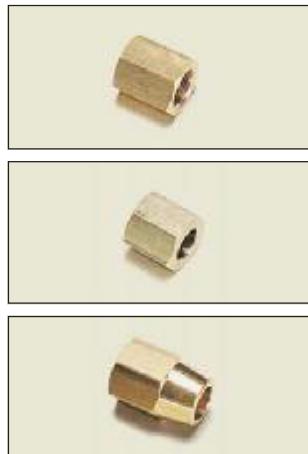


ØD	C		Δkg		Δkg		Δkg
4 M8x1	0110 04 00	0,005	0110 04 00 40	0,004	0110 04 00 60	0,006	
5 M10x1	0110 05 00	0,006	0110 05 00 40	0,006	0110 05 00 60	0,009	
6 M10x1	0110 06 00	0,008	0110 06 00 40	0,008	0110 06 00 60	0,011	
8 M12x1	0110 08 00	0,008	0110 08 00 40	0,009	0110 08 00 60	0,012	
10 M16x1,5	0110 10 00	0,019	0110 10 00 40	0,019	0110 10 00 60	0,027	
12 M18x1,5	0110 12 00	0,026	0110 12 00 40	0,027	0110 12 00 60	0,041	
14 M20x1,5	0110 14 00	0,029	0110 14 00 40	0,030	0110 14 00 60	0,051	
15 M20x1,5	0110 15 00	0,028	0110 15 00 40	0,030	0110 15 00 60	0,050	
16 M22x1,5	0110 16 00	0,043	0110 16 00 40	0,043	0110 16 00 60	0,072	
18 M24x1,5	0110 18 00	0,059	0110 18 00 40	0,057	0110 18 00 60	0,097	
20 M27x1,5	0110 20 00	0,057	0110 20 00 40	0,062	0110 20 00 60	0,102	
22 M30x1,5	0110 22 00	0,079	0110 22 00 40	0,084	0110 22 00 60	0,129	
25 M33x1,5	0110 25 00	0,121	0110 25 00 40	0,130	0110 25 00 60	0,194	
28 M36x1,5	0110 28 00	0,109					

Technical specification of sleeve nuts


tightening torque :

Maxi kg = tightening torque for nut 0110 and olive 0124 on copper, brass or steel tube

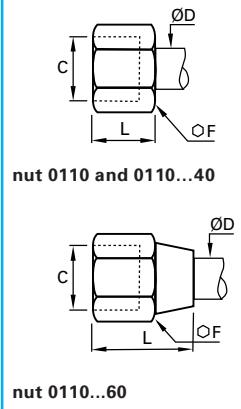

ØD	F 0110	L 0110	F 0110...60	L 0110...60	maxi kg torque copper or brass	F 0110...40	L 0110...40	maxi kg. torque steel
4	10	11	11	14,5	0,7	10	11	1,5
5	12	11	13	17	0,7	12	11,5	1,5
6	13	11	13	17,5	1,5	13	12	2,5
8	14	13	16	20	1,5	14	13,5	2,5
10	19	15	20	23	1,8	19	16	3
12	22	15	22	25	3	22	16,5	4,5
14	24	15	24	30	3,5	24	17	5,5
15	24	15	24	30	4	24	17	6
16	27	17	27	32	5	27	18	7
18	30	18	30	35	6	30	19	9
20	32	18	32	35	6	32	20,5	10
22	36	19	36	36	7	36	21,5	12
25	41	21	41	40	8	41	24	13
28	42	21			9			

0110 suffix 70 nut-olive

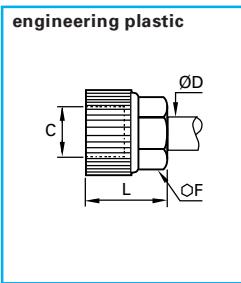


ØD	C		F	L	Δkg
4 M8x1	0110 04 00 70		8	13	0,001
6 M10x1	0110 06 00 70		11	15	0,002
8 M12x1	0110 08 00 70		13	16	0,002
10 M16x1,5	0110 10 00 70		17	19	0,004
12 M18x1,5	0110 12 00 70		19	19	0,005
14 M20x1,5	0110 14 00 70		22	20	0,007
16 M22x1,5	0110 16 00 70		24	21	0,009

NB. plastic nut-olives should not be used on metal tubes.


accessories

0122 tailpiece adaptor for rubber hose

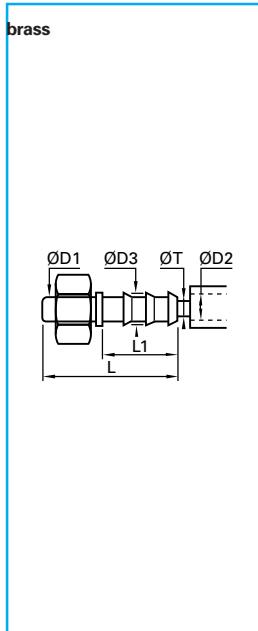


\varnothing	D1	\varnothing	D2		\varnothing	D3	L	L1	\varnothing	T	Δ	kg
4	4	0122	04	04	6	37,5	22,5	3	3	0,004		
5	4	0122	05	04	6	37,5	22,5	3	3	0,004		
6	4	0122	06	04	6	37,5	22,5	3	3	0,005		
6	7	0122	06	07	9	37,5	22,5	6	6	0,007		
8	6	0122	08	06	8	40	22,5	5	5	0,007		
8	7	0122	08	07	9	40	22,5	6	6	0,008		
8	10	0122	08	10	12,5	40	22,5	9	9	0,012		
10	7	0122	10	07	9	43	22,5	6	6	0,010		
10	10	0122	10	10	12,5	43	22,5	9	9	0,013		
12	10	0122	12	10	12,5	43	22,5	9	9	0,013		
12	13	0122	12	13	15	50	29,5	12	12	0,018		
14	13	0122	14	13	15	52	29,5	12	12	0,018		
14	16	0122	14	16	18,5	60,5	38	15	15	0,031		
15	13	0122	15	13	15	52	29,5	12	12	0,020		
15	16	0122	15	16	18,5	60,5	38	15	15	0,032		
16	13	0122	16	13	15	53,5	29,5	12	12	0,021		
16	16	0122	16	16	18,5	62	38	15	15	0,029		
18	16	0122	18	16	18,5	62	38	15	15	0,032		
18	19	0122	18	19	21,5	62	38	18	18	0,039		
20	16	0122	20	16	18,5	64	38	15	15	0,036		
20	19	0122	20	19	21,5	64	38	18	18	0,039		
22	19	0122	22	19	21,5	64	38	18	18	0,040		
25	19	0122	25	19	21,5	70	38	18	18	0,050		
25	25	0122	25	25	27,5	70	38	24	24	0,063		
28	25	0122	28	25	27,5	70	38	24	24	0,088		

0165 tailpiece adaptor for plastic hose

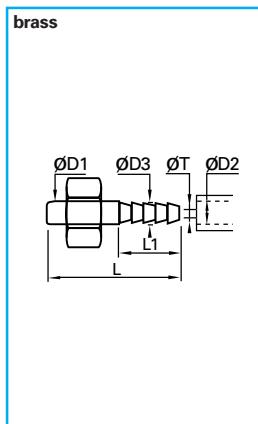

\varnothing	D1	\varnothing	D2		\varnothing	D3	L	L1	\varnothing	T	Δ	kg
4	4	0165	04	06	4,3	30	15	2	2	0,003		
5	4	0165	05	06	4,3	30	15	2	2	0,003		
6	4	0165	06	06	4,3	30	15	2	2	0,003		
6	6	0165	06	08	6,4	30	15	4	4	0,004		
6	8	0165	06	10	8,4	30	15	4	4	0,005		
8	6	0165	08	08	6,4	32,5	15	4	4	0,006		
8	8	0165	08	10	8,4	32,5	15	6	6	0,006		
8	10	0165	08	12	10,7	37,5	20	6	6	0,009		
10	8	0165	10	10	8,4	35,5	15	6	6	0,008		
10	10	0165	10	12	10,7	40,5	20	8	8	0,010		
10	12	0165	10	14	12,7	40,5	20	8	8	0,012		
12	10	0165	12	12	10,7	40,5	20	8	8	0,012		
12	12	0165	12	14	12,7	40,5	20	10	10	0,012		
14	12	0165	14	14	12,7	42,5	20	10	10	0,014		
15	13	0165	15	16	13,7	42,5	20	11	11	0,015		
16	13	0165	16	16	13,7	44	20	11	11	0,018		

(1) + (2) + adaptor
nut + olive + adaptor

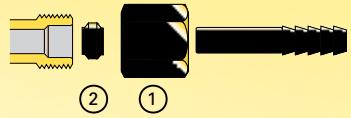


0122 and 0165 tailpiece adaptors are used in place of tube. They are therefore inserted into the fittings and fixed with the nut and olive supplied with the fitting.

quick-acting barbed fittings for self-fastening tube



Exclusively designed to be connected to self-fastening tubing (see Tubes and Hoses section), Legris quick-acting barbed fittings are perfectly adapted to modern requirements of industry, such as automation. Connection is quick and easy :

- no grease or oil is needed to lubricate the tube and no preparation time is required. Safety for both installer and user is safeguarded since the tube when pushed onto the fitting butts against and beneath the grey collar visually confirming correct connection.
- to disconnect, cut the tube with a knife on the barbed side of the fitting.




correct connection =
the tube is pushed on to the fitting to butt against and beneath the collar




Legris self-fastening tube can be found on page M17 of this catalogue.

0132 quick-acting barbed fitting with brass compression fitting

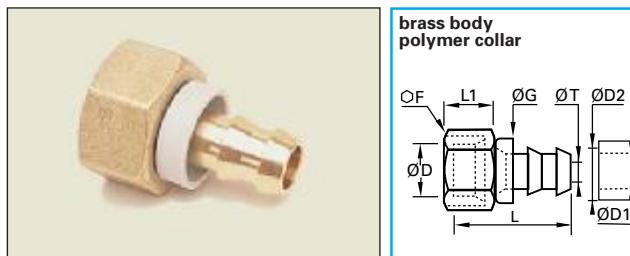


ØD	DN	ØD1	ØD2	F	G	L	L1	T	Δkg	
6	1/4	0132 06 56	6,3	13	12	16,5	32,5	12,5	4,8	0,012
8	1/4	0132 08 56	6,3	13	14	16,5	29,5	11,5	4,8	0,014
10	1/4	0132 10 56	6,3	13	19	16,5	30	14	4,8	0,027
10	3/8	0132 10 60	9,5	16	19	19,5	34	14	7,5	0,035
14	3/8	0132 14 60	9,5	16	24	19,5	35,5	15	7,5	0,049
14	1/2	0132 14 62	12,7	19	24	23,5	39,5	15	10	0,054
18	1/2	0132 18 62	12,7	19	30	23,5	41,5	17	10	0,092
18	5/8	0132 18 66	15,9	23	30	27	50	17	13,5	0,090
22	3/4	0132 22 69	19,1	27	36	30,5	56,5	17	16	0,128

0133...39 quick-acting barbed fitting with male BSP parallel thread

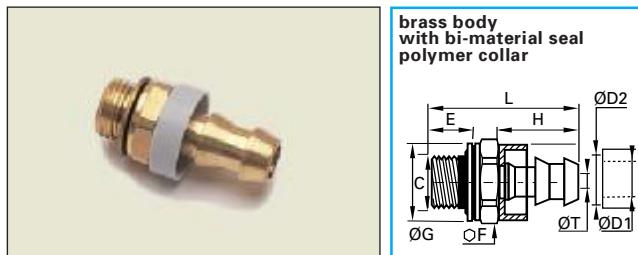

C	DN	ØD1	ØD2	E	F	G	H	L	T	Δkg
G1/8 1/4	0133 56 10 39	6,3	13	5,5	13	14	20	31,5	4,8	0,012
G1/4 1/4	0133 56 13 39	6,3	13	7	17	17	20	33,5	4,8	0,020
G1/4 3/8	0133 60 13 39	9,5	16	7	17	17	24	37,5	7,5	0,021
G3/8 3/8	0133 60 17 39	9,5	16	9,5	22	22	24	42,5	7,5	0,035
G3/8 1/2	0133 62 17 39	12,7	19	9,5	22	22	28	46,5	10	0,038
G1/2 1/2	0133 62 21 39	12,7	19	10,5	27	26	28	48,5	10	0,064
G1/2 5/8	0133 66 21 39	15,9	23	10,5	27	26	36,5	57	13,5	0,057
G3/4 5/8	0133 66 27 39	15,9	23	11,5	32	32	36,5	59	13,5	0,101
G3/4 3/4	0133 69 27 39	19,1	27	11,5	32	32	43	65,5	16	0,107

0134 quick-acting barbed fitting with male BSP taper thread

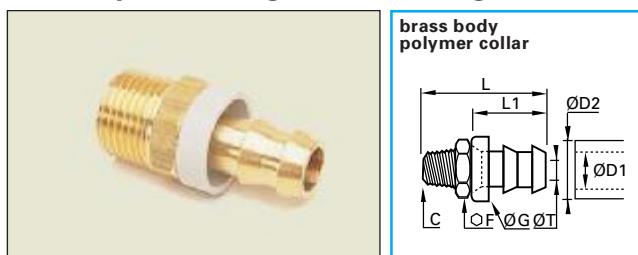



C	DN	ØD1	ØD2	F	G	L	L1	T	Δkg
R1/8 1/4	0134 56 10	6,3	13	14	16,5	32,5	20	4,8	0,012
R1/4 1/4	0134 56 13	6,3	13	14	16,5	37	20	4,8	0,020
R1/4 3/8	0134 60 13	9,5	16	14	19,5	41	24	7,5	0,021
R3/8 3/8	0134 60 17	9,5	16	19	19,5	41,5	24	7,5	0,035
R3/8 1/2	0134 62 17	12,7	19	19	23,5	45,5	28	10	0,038
R1/2 1/2	0134 62 21	12,7	19	22	23,5	50	28	10	0,064
R1/2 5/8	0134 66 21	15,9	23	22	27	58,5	36,5	13,5	0,057
R3/4 5/8	0134 66 27	15,9	23	27	27	60,5	36,5	13,5	0,101
R3/4 3/4	0134 69 27	19,1	27	27	30,5	67	43	16	0,107

Maximum torque for model 0132

ØD	6	8	10	14	18	22
maxi.torque in m.daN	0,7	1,5	1,8	3,5	6	7

accessories

0126 plug

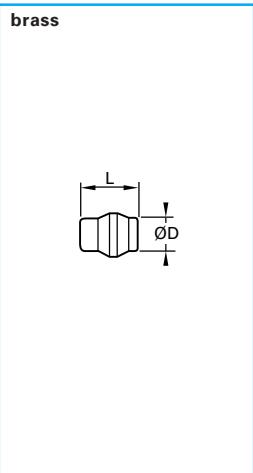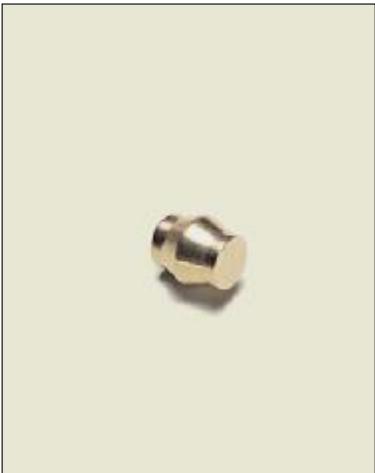



ØD		L	Δ_{kg}
4	0126 04 00	10	0,002
5	0126 05 00	10	0,002
6	0126 06 00	10	0,003
8	0126 08 00	11,5	0,006
10	0126 10 00	13	0,011
12	0126 12 00	13	0,014
14	0126 14 00	13,5	0,020
15	0126 15 00	13,5	0,022
16	0126 16 00	16	0,030
18	0126 18 00	16	0,038
20	0126 20 00	16	0,046
22	0126 22 00	18	0,062
28	0126 28 00	19,5	0,108

The plug is used to blank off an outlet in a compression fitting.

It replaces the olive.

When an open outlet is required simply dismantle, replace the plug by the tube and olive, reusing the nut. The plug is also reusable.

0125 metric parallel tube end plug

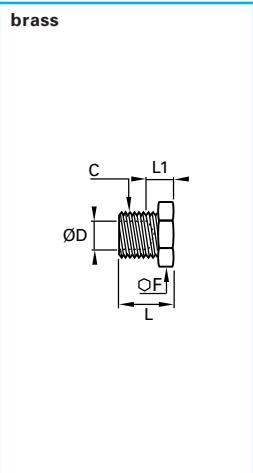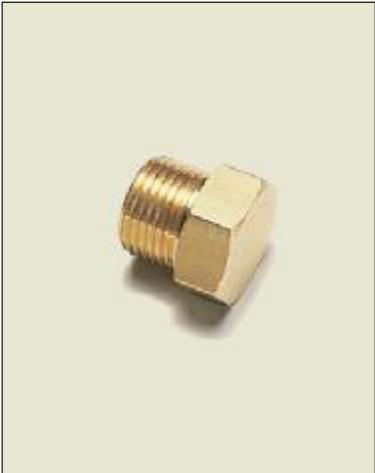



ØD	C	F	L	L1	Δ_{kg}
4M8x1	0125 04 00	10	12	8	0,006
6M10x1	0125 06 00	11	13,5	9,5	0,009
8M12x1	0125 08 00	14	14	9	0,012
10M16x1,5	0125 10 00	17	18	11	0,025
12M18x1,5	0125 12 00	19	18	11	0,031
14M20x1,5	0125 14 00	22	19	11	0,039

This plug enables unused tubes to be blanked off.

The male thread on the plug has the same pitch as the female thread on the sleeve nut of a standard Legris fitting. Therefore the plug screwed into the sleeve nut blanks off the tube.

To reopen the passage, simply unscrew the plug and fit the required coupler. No further treatment of the tube is required.


0220...39 male plug, BSP parallel thread

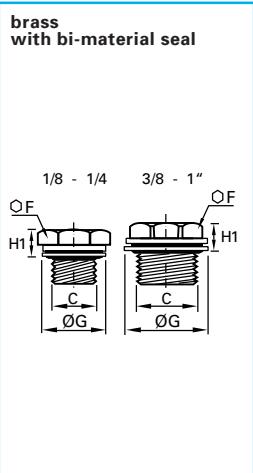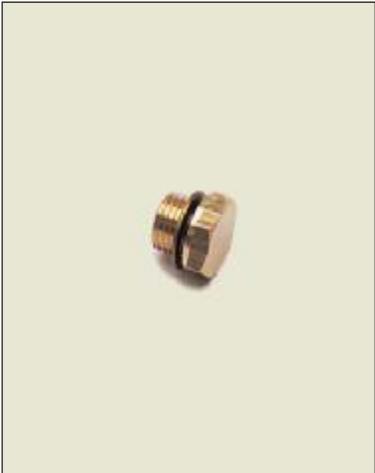

C		F	G	H1	Δ_{kg}
G1/8	0220 10 00 39	14	14	6,5	0,005
G1/4	0220 13 00 39	17	17	6,5	0,016
G3/8	0220 17 00 39	17	22	8	0,021
G1/2	0220 21 00 39	22	26	9	0,045
G3/4	0220 27 00 39	22	32	10	0,053
G1"	0220 34 00 39	27	39,5	10,5	0,067


accessories

0120 straight stem adaptor, BSP taper thread

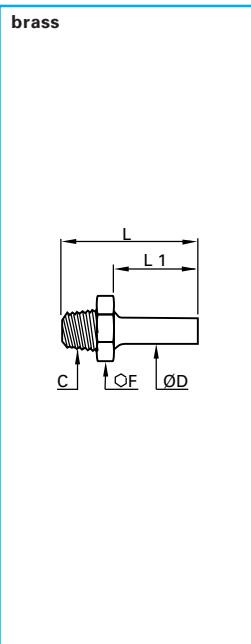

ØD		F	L	L1	$\Delta \text{kg} \Delta$
4 R1/8	0120 04 10	11	25,5	14	0,007
5 R1/8	0120 05 10	11	26	14,5	0,008
6 R1/8	0120 06 10	11	26,5	15	0,008
6 R1/4	0120 06 13	14	31	15	0,015
8 R1/8	0120 08 10	11	28,5	17	0,008
8 R1/4	0120 08 13	14	33	17	0,016
8 R3/8	0120 08 17	17	33,5	17	0,021
10 R1/4	0120 10 13	14	36	20	0,017
10 R3/8	0120 10 17	17	36,5	20	0,022
10 R1/2	0120 10 21	22	41	20	0,040
12 R1/4	0120 12 13	14	36	20	0,017
12 R3/8	0120 12 17	17	36,5	20	0,022
12 R1/2	0120 12 21	22	41	20	0,045
14 R3/8	0120 14 17	17	38	21,5	0,023
14 R1/2	0120 14 21	22	42,5	21,5	0,040
15 R3/8	0120 15 17	17	38	21,5	0,023
15 R1/2	0120 15 21	22	42,5	21,5	0,039
16 R3/8	0120 16 17	17	39,5	23	0,024
16 R1/2	0120 16 21	22	44	23	0,042
18 R1/2	0120 18 21	22	44,5	23,5	0,041
18 R3/4	0120 18 27	27	47,5	23,5	0,071
20 R3/4	0120 20 27	27	49	25	0,069
22 R3/4	0120 22 27	27	48,5	25,5	0,067
22 R1"	0120 22 34	36	52,5	25,5	0,116
25 R1"	0120 25 34	36	57	30	0,117
28 R1"	0120 28 34	36	57	30	0,138


0112 male sleeve nut for standard olive

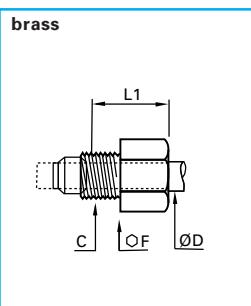

ØD	C	F	L1	$\Delta \text{kg} \Delta$
4 M8x1	0112 04 00	10	8,5	0,006
5 M10x1	0112 05 00	11	9,5	0,007
6 M10x1	0112 06 00	11	9,5	0,008
8 M12x1	0112 08 00	13	10,5	0,009
10 M16x1,5	0112 10 00	17	11	0,018
12 M18x1,5	0112 12 00	19	11	0,021
14 M20x1,5	0112 14 00	22	12	0,026

This product is designed to allow the tube to be fitted directly into the tapped port in a body using a standard Legris olive.

0127 ferrule for plastic tube


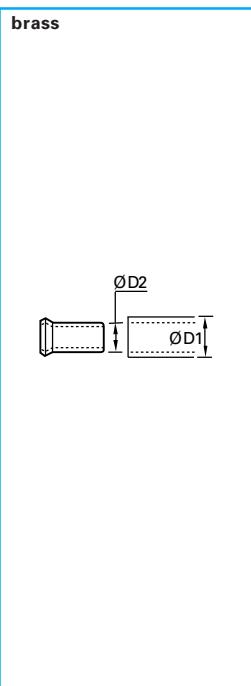


ØD1	ØD2		$\Delta \text{kg} \Delta$
4	2	0127 04 00	0,001
4	2,7	0127 04 27	0,001
5	3	0127 05 03	0,001
5	3,3	0127 05 00	0,001
6	4	0127 06 00	0,001
8	5,5	0127 08 55	0,001
8	6	0127 08 00	0,001
10	7	0127 10 07	0,002
10	7,5	0127 10 75	0,002
10	8	0127 10 00	0,002
12	8	0127 12 08	0,002
12	9	0127 12 09	0,002
12	10	0127 12 00	0,002
14	11	0127 14 11	0,003
14	12	0127 14 00	0,003
15	12	0127 15 12	0,003
16	13	0127 16 13	0,003
18	14	0127 18 14	0,004
20	15	0127 20 15	0,004
22	16	0127 22 16	0,005
25	19	0127 25 19	0,005

At high temperature and pressure or during oscillating movements, the use of ferrules prevents distortion of the tube and guarantees effective gripping and sealing.


accessories

0128...39 straight stem adaptor, BSP parallel thread

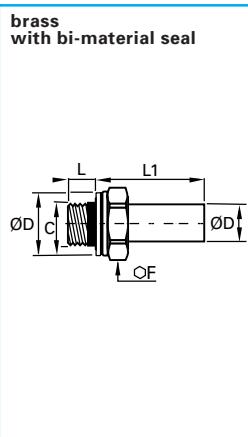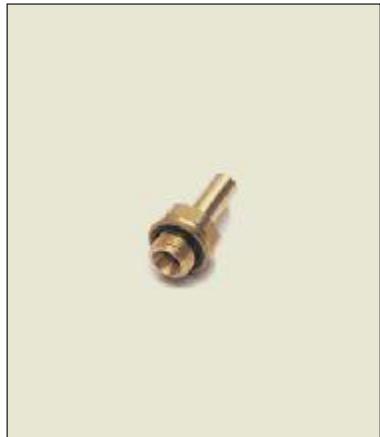


ØD	C		F	G	L	L1	Δkg
4 G1/8	0128 04 10 39		13	14	7,5	20	0,008
4 G1/4	0128 04 13 39		17	17	9	22	0,010
6 G1/8	0128 06 10 39		13	14	7,5	21	0,009
6 G1/4	0128 06 13 39		17	17	9	23	0,015
8 G1/8	0128 08 10 39		13	14	7,5	23	0,009
8 G1/4	0128 08 13 39		17	17	9	25	0,017
8 G3/8	0128 08 17 39		22	22	12	26	0,022
10 G1/4	0128 10 13 39		17	17	9	28	0,017
10 G3/8	0128 10 17 39		22	22	12	29	0,025
10 G1/2	0128 10 21 39		27	26	27	30	0,042
14 G3/8	0128 14 17 39		22	22	12	30,5	0,025
14 G1/2	0128 14 21 39		27	26	27	31,5	0,043
18 G1/2	0128 18 21 39		27	26	27	33,5	0,044
18 G3/4	0128 18 27 39		32	32	14	34,5	0,073
22 G3/4	0128 22 27 39		32	32	14	36,5	0,069
22 G1"	0128 22 34 39		41	39,5	16,5	38	0,118
28 G1"	0128 28 34 39		41	39,5	16,5	42,5	0,140

0151 straight male orientable adaptor, BSP parallel thread

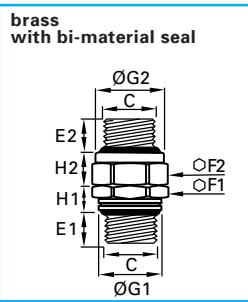

C		E1	E2	F1	F2	G1	G2	H1	H2	Δkg
G1/8	0151 10 10 39	5,5	7	13	14	14	14	6	6,5	0,017
G1/4	0151 13 13 39	7	8,5	17	19	17	19	6,5	9	0,026
G3/8	0151 17 17 39	9,5	9,5	22	22	22	22	9	9	0,042
G1/2	0151 21 21 39	10,5	10,5	27	27	26	26	10	10	0,070
G3/4	0151 27 27 39	11,5	11,5	32	32	32	32	11	10,5	0,096
G1"	0151 34 34 39	13	13,5	41	41	39,5	39,5	12,5	13	0,115

0168...39 reducer male to female, BSP parallel thread

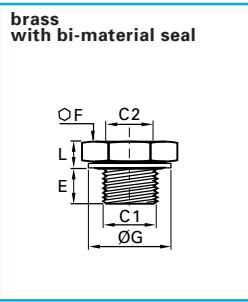

C1	C2		E	F	G	L	Δkg
G1/8 M5x0,8	0168 10 19 39		8	14	14	4,5	0,010
G1/4 M5x0,8	0168 13 19 39		8	17	17	5	0,012
G1/4 G1/8	0168 13 10 39		8	17	17	5	0,020
G3/8 G1/8	0168 17 10 39		10	19	22	5	0,028
G3/8 G1/4	0168 17 13 39		10	19	22	5	0,035
G1/2 G1/8	0168 21 10 39		12	24	26	7,5	0,039
G1/2 G1/4	0168 21 13 39		12	24	26	7,5	0,056
G1/2 G3/8	0168 21 17 39		12	24	26	7,5	0,062
G3/4 G1/4	0168 27 13 39		12	32	32	9,5	0,067
G3/4 G3/8	0168 27 17 39		12	32	32	9,5	0,097
G3/4 G1/2	0168 27 21 39		12	32	32	9,5	0,116

This catalogue offers a range of brass accessories compatible with brass compression fittings.
Please refer to section H.

special products

brass compression fittings



Bespoke products include special connections, fluids compatibility, threads, shape, temperature, materials etc., which preclude the use of standard fittings. Legris is pleased to share its knowledge and experience to solve special problems.



Brass compression fittings can be used with various plastic tubing shown in this catalogue :

- semi-rigid Nylon tube
4 mm to 16 mm OD
- rigid Nylon tube
4 mm to 10 mm OD
- fluoropolymer tube FEP 140
4 mm to 12 mm OD
- PVC tubing
8 mm to 26 mm OD

